

**APPLICATION FOR UNITED STATES LETTERS PATENT**

**for**

**COMPATIBLE BLEND SYSTEMS OF OXYGEN BARRIER POLYMERS AND  
OXYGEN SCAVENGING POLYMERS**

**by**

**Hu Yang, Ta Yen Ching, and Gangfeng Cai**

**EXPRESS MAIL MAILING LABEL**

**NUMBER EL522494315US**

**DATE OF DEPOSIT JUNE 16, 2000**

I hereby certify that this paper or fee is being deposited with the United States Postal Service "EXPRESS MAIL POST OFFICE TO ADDRESSEE" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to: BOX PATENT APPLICATION, Assistant Commissioner for Patents, Washington D.C. 20231.

  
Signature

Ins A1 >

## **BACKGROUND OF THE INVENTION**

### **1. Field of the Invention**

The present invention relates generally to the field of oxygen scavenging polymers. More particularly, it concerns blends of oxygen barrier polymers, such as poly(ethylene/vinyl alcohol) (EVOH), polyvinylidenechloride (PVDC), polyethylene terephthalate (PET), or polyamide other than MXD6, with oxygen scavenging polymers, methods of making the blends, packaging articles comprising the blends, and methods of making the packaging articles.

### **2. Description of Related Art**

It is well known that limiting the exposure of oxygen-sensitive products to oxygen maintains and enhances the quality and shelf-life of the product. For instance, by limiting the oxygen exposure of oxygen sensitive food products in a packaging system, the quality of the food product is maintained, and food spoilage is avoided. In addition such packaging also keeps the product in inventory longer, thereby reducing costs incurred from waste and restocking. In the food packaging industry, several means for limiting oxygen exposure have already been developed, including modified atmosphere packaging (MAP), vacuum packaging and oxygen barrier film packaging. In the first two instances, reduced oxygen environments are employed in the packaging, while in the latter instance, oxygen is physically prevented from entering the packaging environment.

Another, more recent, technique for limiting oxygen exposure involves incorporating an oxygen scavenger into the packaging structure. Incorporation of a scavenger in the package can scavenge environmental oxygen as it diffuses into the packaging structure, as well as scavenging residual oxygen present inside the package upon filling. Generally, the oxygen scavenger functions by irreversibly reacting with oxygen, and as a result, there exists a maximum amount of oxygen (the "oxygen scavenging capacity") that the scavenger can scavenge. However, increasing the oxygen scavenging capacity by increasing the quantity of the oxygen scavenging polymer has the disadvantage of, typically, impairing the structural properties of the packaging article, as well as increasing the cost of materials and the cost or complexity of processing.

From this, it will be recognized that limiting oxygen ingress into the packaging article is beneficial. If oxygen ingress into the packaging article is limited, less of the oxygen scavenging polymer will be required, and less can be used, thus improving the physical properties and processing of the packaging article. This is especially significant for products that are oxygen-sensitive but otherwise fairly resistant to spoilage, and are thus capable of shelf-lives on the order of at least months, or up to a year or more, such as beer or wine.

Oxygen barrier polymers, such as poly(ethylene/vinyl alcohol) (EVOH), polyethylene terephthalate (PET), polyvinylidenechloride (PVDC), and polyamide, whether cast, blown, or oriented, are widely known for having barrier properties to gases (such as O<sub>2</sub> and CO<sub>2</sub>) and other fluids, and have found wide use in packaging applications where barrier properties are desired. However, it is generally held that their oxygen barrier properties should be better for packaging applications which require high oxygen barrier properties over a long period of time, such as beer packaging.

Therefore, it would be desirable to have a packaging article comprising an oxygen barrier polymer and an additional component or components, which packaging article would be better suited for providing a high gas (O<sub>2</sub> or CO<sub>2</sub>) barrier over a long period of time than are packaging articles currently known.

Cochran et al., U.S. Patent No. 5,021,515, discloses a layer of a packaging article comprising 96 % polyethylene terephthalate, 4 % nylon MXD6, and 200 ppm cobalt.

Paleari et al., U.S. Patent No. 6,063,417, discloses a packaging film comprising a core layer comprising about 40 wt% to about 85 wt% nylon 6/12, and about 15 wt% to about 60 wt% ethylene/vinyl alcohol copolymer (EVOH).

Koyama et al., U.S. Patent No. 5,153,038, discloses a packaging article comprising a layer comprising an oxygen scavenger, such as a polyhydric phenol, and a gas barrier resin, such as EVOH or polyamide.

Hong et al., U.S. Patent No. 5,281,360, discloses a blend of a polymer, such as a formable polyester or polycarbonate; an oxygen barrier material, such as EVOH, aromatic or aliphatic nylon, or amorphous nylon (including, according to Hong et al., nylon MXD6); and a transition metal catalyst. The nylon MXD6 can be present up to about 30 wt%, with the balance being, preferably, polyethylene terephthalate (PET).

Collette et al., U.S. Patent No. 5,759,653, discloses a blend of PET with an oxygen scavenger, such as nylon MXD6.

## **SUMMARY OF THE INVENTION**

5

In one set of embodiments, the present invention relates to a composition, comprising a blend of an oxygen barrier polymer, an oxygen scavenging polymer, and an oxidation catalyst. The blend can be miscible or compatible. In one embodiment, the composition can further comprise a compatibilizer. Preferred oxygen barrier polymers  
10 include EVOH, PET, PVDC, polyacrylonitrile (PAN), copolymers comprising acrylonitrile, and polyamide other than MXD6.

In a related embodiment, the present invention also relates to a packaging article comprising at least one layer comprising the blend of the oxygen barrier polymer and an oxygen scavenging polymer. The packaging article can be a single-layer or a multilayer  
15 article, and can be flexible or rigid. A multilayer packaging article can further comprise a structural layer or layers, an oxygen barrier layer or layers not comprising an oxygen scavenging polymer, an oxygen scavenging layer, an oxygen permeable layer or layers, or an adhesive layer or layers, among others.

In yet another embodiment, the present invention relates to a method of making  
20 the blend of an oxygen barrier polymer and an oxygen scavenging polymer, comprising providing the oxygen barrier polymer and the oxygen scavenging polymer, and blending the materials. The blending step can further comprise enhancing the miscibility or compatibility to improve the compatibility of the blends by using any suitable compatibilizer.

25 The present invention provides packaging articles that have a high oxygen barrier for a long period of time, by taking advantage of the inherent oxygen barrier property of e.g. EVOH, PET, PVDC, PAN, or polyamide other than MXD6 and the oxygen scavenging property of the oxygen scavenging polymer. Because of the low accessibility of oxygen to the oxygen scavenging polymer (OSP) on account of the oxygen barrier  
30 polymer, only trace oxygen will reach the OSP; therefore, the OSP is typically not consumed quickly and thus has a very long period of useful life. The present invention

also provides packaging articles having the advantage of providing a CO<sub>2</sub> barrier (useful in retaining the carbonation of packaged soft drinks, beer, and sparkling wines) due to the inherent barrier properties of the barrier resin, as the OSP is only incorporated at a level below that which would reduce the inherent crystallinity and physical barrier properties of the oxygen barrier polymer. Further, a blend of the oxygen barrier polymer and the oxygen scavenging polymer typically has good clarity and is readily processible (e.g. having improved processibility as is or in coextrusion with other polymers, due to modified polymer rheology and interpolymer adhesion) into a variety of formulations.

## **DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS**

### **Oxygen barrier compositions**

In one embodiment, the present invention relates to a composition, comprising a blend of an oxygen barrier polymer and an oxygen scavenging polymer. Such a composition is useful as a component of an oxygen barrier layer of a packaging article. By "oxygen barrier layer" is meant a layer comprising the blend of the oxygen barrier polymer and the oxygen scavenging polymer. Because of the presence of the OSP, the oxygen barrier layer may be referred to as an "active oxygen barrier layer."

Packaging articles typically come in several forms including a single layer flexible article, a multilayer flexible article, a single layer rigid article, or a multilayer rigid article. Typical rigid or semirigid articles include plastic, paper or cardboard cartons or bottles such as juice containers, soft drink containers, thermoformed trays, or cups, which have wall thicknesses in the range of 100 to 1000 micrometers. Typical flexible articles include those used to package many food items, and will likely have a thickness of 5 to 250 micrometers. The walls of such articles either comprise single or multiple layers of material.

The packaging article comprising the oxygen barrier composition can be used to package any product for which it is desirable to inhibit oxygen damage during storage, e.g. food, beverage, pharmaceuticals, medical products, cosmetics, corrodible metals, or electronic devices. It is especially useful for packaging products for which it is desirable to maintain a high oxygen barrier for a long period of time, e.g. beer, wine, and other

beverages. It is also especially useful for packaging products for which it is desirable to retain carbon dioxide, e.g. beer, sparkling wine, and soft drinks.

5 The packaging article comprising the oxygen barrier composition can comprise a single layer comprising the composition, or an oxygen barrier layer and additional layers, such as an oxygen scavenging layer, an oxygen barrier layer not comprising an oxygen scavenging polymer, a food-contact layer, a structural layer, or an adhesive layer, alone or in any combination. Single layered packaging articles can be prepared by solvent casting, injection molding, blow molding, or by extrusion, among other techniques. Packaging articles with multiple layers are typically prepared using coextrusion, injection  
10 molding, blow molding, coating, or lamination, among other techniques.

The packaging article can comprise any oxygen barrier composition described below.

As stated above, the oxygen barrier composition comprises a blend of an oxygen barrier polymer and an oxygen scavenging polymer. Preferably, it further comprises an  
15 oxidation catalyst. Preferably, the composition, when formed into a film, has an oxygen transmission rate at least 5 times lower than that of the oxygen barrier polymer alone.


The oxygen barrier polymer is any polymer generally viewed as providing a barrier to oxygen passage, e.g. a 1 mil layer consisting essentially of the oxygen barrier polymer has an oxygen transmission rate of less than about 100 cc/m<sup>2</sup>/day at room  
20 temperature under 1 atm O<sub>2</sub>. In one preferred embodiment, the oxygen barrier polymer is poly(ethylene vinyl alcohol) (EVOH). In still another preferred embodiment, the oxygen barrier polymer is polyacrylonitrile (PAN) or a copolymer comprising acrylonitrile. In a further preferred embodiment, the oxygen barrier polymer is poly(vinylidene dichloride) (PVDC). In yet an additional preferred embodiment, the oxygen barrier polymer is  
25 polyethylene terephthalate (PET). In yet a further preferred embodiment, the oxygen barrier polymer is polyethylene naphthalate (PEN). In still an additional preferred embodiment, the oxygen barrier polymer is a polyamide other than MXD6. The polyamide can be aliphatic or aromatic. Preferred polyamides include nylon 6 and nylon 6,6.

Two or more oxygen barrier polymers can be used. The appropriateness of a particular oxygen barrier polymer may vary depending on the intended use of the polymer, the composition, or a packaging article made therefrom.

5 The oxygen scavenging polymer can be any organic compound that irreversibly reacts with oxygen. Preferably, the OSP is a thermoplastic that is miscible or compatible with the oxygen barrier polymer. The polymer can be an addition polymer or a condensation polymer. Examples of addition polymers include, but are not limited to, polymer or copolymer containing either a main chain or pendant cyclic olefinic group, preferably a cyclic olefin group having a cyclohexene structure, such as ethylene/methyl  
10 acrylate/cyclohexenylmethyl acrylate terpolymer (EMCM), ethylene/vinyl cyclohexene copolymer (EVCH) or ethylene/ cyclohexenylmethyl acrylate copolymer (ECHA), or cyclohexenylmethyl acrylate homopolymer (CHAA). Examples also include, but are not limited to, polymer or copolymers containing pendant benzylic group, such as ethylene/methyl acrylate/benzylmethyl acrylate terpolymer (EMBZ). Examples also  
15 include diene polymers such as polyisoprene, polybutadiene, and copolymers thereof, e.g. styrene-butadiene. Also included are polymeric compounds such as polypentenamer, polyoctenamer, and other polymers prepared by olefin metathesis; diene oligomers such as squalene; and polymers or copolymers derived from dicyclopentadiene, norbornadiene, 5-ethylidene-2-norbornene, or other monomers containing more than one  
20 carbon-carbon double bond (conjugated or non-conjugated).

Examples of condensation polymers include, but are not limited to, condensation polymers such as polyester polymers or copolymers containing carbon-carbon double bonds. More preferably, the polyester containing either a main chain or a pendant cyclic olefinic groups and cyclic olefinic group, preferably a cyclohexene moiety.

25 Preferably, the oxygen scavenging polymer comprises either an ethylenic or a polyester backbone and at least one cyclic olefinic group, either in the main chain or as a pendant group. More preferably, the cyclic olefinic group is a cycloalkenyl group having the structure I:



wherein  $q_1$ ,  $q_2$ ,  $q_3$ ,  $q_4$ , and  $r$  are independently selected from hydrogen, methyl, or ethyl;  $m$  is  $-(CH_2)_n-$ , wherein  $n$  is an integer from 0 to 4, inclusive; and, when  $r$  is hydrogen, at least one of  $q_1$ ,  $q_2$ ,  $q_3$ , and  $q_4$  is also hydrogen.

One most preferred oxygen scavenging compound is ethylene/vinyl cyclohexene copolymer (EVCH).

Preferably, the oxygen scavenging polymer further comprises a linking group linking the ethylenic backbone to the cyclic olefinic group. The linking group is selected from:


$-O-(CHR)_n-$ ;  $-(C=O)-O-(CHR)_n-$ ;  $-NH-(CHR)_n-$ ;  $-O-(C=O)-(CHR)_n-$ ;  $-(C=O)-NH-(CHR)_n-$ ; or  $-(C=O)-O-CHOH-CH_2-O-$ .

More preferably, the cyclic olefinic group is a cycloalkenyl group having the structure I. Even more preferably, in structure I,  $n$  is 1, and  $q_1$ ,  $q_2$ ,  $q_3$ ,  $q_4$ , and  $r$  are each hydrogen.

Another most preferred oxygen scavenging polymer is ethylene/methyl acrylate/cyclohexenylmethyl acrylate terpolymer (EMCM). A further most preferred oxygen scavenging polymer is ethylene/cyclohexenylmethyl acrylate copolymer (ECHA). Yet a further most preferred oxygen scavenging polymer is cyclohexenylmethyl acrylate homopolymer (CHAA).

In another embodiment, the oxygen scavenging polymer is a polyester polymer comprising monomers derived from tetrahydrophthalic anhydride derivative, or diols having structure II:



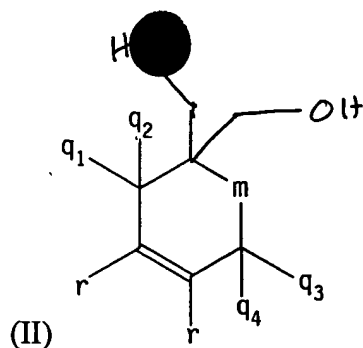

wherein  $q_1$ ,  $q_2$ ,  $q_3$ ,  $q_4$ , and  $r$  are independently selected from hydrogen, methyl, or ethyl;  $m$  is  $-(CH_2)_n-$ , wherein  $n$  is an integer from 0 to 4, inclusive; and, when  $r$  is hydrogen, at least one of  $q_1$ ,  $q_2$ ,  $q_3$ , and  $q_4$  is also hydrogen.

Preferably, the diol contains a cyclohexene structure, such as 3-cyclohexene-1,1 dimethanol monomer.

Two or more oxygen scavenging polymers can be used. It should be noted that the appropriate oxygen scavenging polymer for a given use will depend on the intended use, its processibility with the oxygen barrier polymer, and other parameters.

The blend can comprise from about 0.1% to about 50% of the oxygen scavenging polymer by weight. Preferably, the blend comprises from about 5% to about 30% of the oxygen scavenging polymer by weight. The level of OSP should not significantly plasticize the barrier polymer to cause a significant lowering in passive barrier properties.

The blend makes up at least about 50%, preferably at least about 80%, more preferably at least about 90%, most preferably at least about 95%, by weight of the oxygen barrier composition, with the remainder made up of other constituents, as described below.

The blend is preferably in the form of a miscible or compatible blend.

Alternatively, the oxygen scavenging polymer can be present in the composition as an insoluble filler (i.e. the oxygen scavenging polymer is cross-linked with itself and is incorporated into the oxygen barrier polymer matrix as a filler).

Typically, the blend is made up with the oxygen barrier polymer as a matrix or dispersing phase, with the oxygen scavenging polymer as the dispersed phase. Because oxygen diffusion is limited through the oxygen barrier polymer matrix, oxygen scavenging by the oxygen scavenging polymer phase would become highly efficient, thus

allowing enhancement of the oxygen barrier properties of the blend relative to that of the oxygen barrier polymer alone.

From both performance and processing point of view, it is typically desirable that the oxygen scavenging polymer be efficiently dispersed in the barrier polymers.

- 5 Therefore, a compatibilizer may be needed to improve the miscibility or compatibility of the blend.

Preferred compatibilizers include an anhydride-modified or acid-modified poly(ethylene acrylate), poly(ethylene vinyl acetate), or polyethylene. Another preferred compatibilizer is a block copolymer of the oxygen barrier polymer or a polymer similar thereto (such as EVOH, PET, PVDC, polyethylene naphthalate (PEN), or polyamide other than MXD6, among others) and EMCM, ECHA, EVCH, CHAA, or a polymer similar thereto (such as another polymer with an ethylenic backbone and a cycloalkenyl side chain).

10

In the compatibilizer, the blocks of the oxygen barrier polymer or a polymer similar thereto can be linked to the blocks of EMCM, ECHA, EVCH, CHAA, or a polymer similar thereto by any appropriate linkage, such as ester, carbonate, amide, ether, urethane, or urea linkages. The linkages can be readily formed by attaching components of the linkage to the ends of the two different types of blocks, or by forming the linkage from components thereof already present at the ends of the two different types of blocks, such as hydroxy and ester components of an ester linkage such as is used in polyester synthesis. The latter technique can be used with monomers of the oxygen barrier polymer or polymer similar thereto and the EMCM, ECHA, EVCH, CHAA, or polymer similar thereto, or with blocks of the two types of monomers. Alternatively, the linkages can be formed by making monomers or blocks of EMCM, ECHA, EVCH, CHAA, or a polymer similar thereto with reactive end groups, such as hydroxy, ester, or acid end groups, and then blending it with the oxygen barrier polymer or polymer similar thereto to form block polymers *in situ* during blending.

15

20

25

More preferably, the compatibilizer is a block copolymer of one of EVOH, PET, PVDC, PEN, or polyamide other than MXD6 with one of EMCM, ECHA, EVCH, or CHAA.

30

Acrylic acid-containing compatibilizers can also be used.

Preferably, the compatibilizer is present in the blend at no more than about 15% by weight, preferably in the range of about 0.5 wt% to about 1.0 wt%.

Alternatively, the oxygen scavenging polymer can be rendered insoluble (meaning "internally cross-linked") by any appropriate mechanism, e.g. by reacting the oxygen scavenging polymer with a chemical crosslinker or by polymerizing the oxygen scavenging polymer with itself to form a cross-linked structure. The insoluble oxygen scavenging polymer can then be mixed into the oxygen barrier polymer phase as a filler.

Other compounds are commonly used with oxygen scavenging polymers, in order to enhance the functionality of the oxygen scavenging polymers in storage, processing into a layer of a packaging article, or use of the packaging article. Such enhancements include, but are not limited to, limiting the rate of oxygen scavenging by the oxygen scavenging polymer prior to filling of the packaging article with a product, initiating oxygen scavenging by the oxygen scavenging polymer at a desired time, limiting the induction period (the period between initiating oxygen scavenging and scavenging of oxygen at a desired rate), or rendering the layer comprising the oxygen scavenging polymer stronger or more transparent, among others. These compounds can be added to the oxygen barrier composition comprising the blend of the oxygen barrier polymer and the oxygen scavenging polymer, in order to enhance the functionality of the oxygen scavenging polymer in the composition.

The composition further comprises an oxidation catalyst, such as a transition metal. The transition metal functions to catalyze oxygen scavenging by the oxygen scavenging polymer, increasing the rate of scavenging and reducing the induction period. Though not to be bound by theory, useful transition metals include those which can readily interconvert between at least two oxidation states. See Sheldon, R. A.; Kochi, J. K.; "Metal-Catalyzed Oxidations of Organic Compounds" Academic Press, New York 1981.

Preferably, the transition metal is in the form of a salt, with the transition metal selected from the first, second or third transition series of the Periodic Table. Suitable metals include, but are not limited to, manganese, iron, cobalt, nickel, copper, rhodium, and ruthenium. The oxidation state of the metal when introduced need not necessarily be that of the active form. The metal is preferably iron, nickel, manganese, cobalt or copper;

more preferably manganese or cobalt; and most preferably cobalt. Suitable counterions for the metal include, but are not limited to, chloride, acetate, oleate, stearate, palmitate, 2-ethylhexanoate, neodecanoate, or naphthenate; preferably, the counterion is selected from C<sub>1</sub>-C<sub>20</sub> alkanoates. Preferably, the salt, the transition metal, and the counterion are  
5 either on the U.S. Food and Drug Administration GRAS (generally regarded as safe) list, or exhibit substantially no migration from the packaging article to the product (i.e. less than about 500 ppb, preferably less than about 50 ppb, in the product). Particularly preferable salts include cobalt oleate, cobalt stearate, cobalt 2-ethylhexanoate, and cobalt neodecanoate. The metal salt may also be an ionomer, in which case a polymeric  
10 counterion is employed. Such ionomers are well known in the art.

Typically, the amount of transition metal may range from 0.001 to 1% (10 to 10,000 ppm) of the composition, based on the metal content only (excluding ligands, counterions, etc.). In a packaging article, the transition metal can be formed in an oxygen barrier layer comprising the oxygen barrier composition of the invention, or in a layer  
15 adjacent to the oxygen barrier layer.

Another compound that can be added to the composition is a photoinitiator, or a blend of different photoinitiators. A photoinitiator is preferred if antioxidants are included in the composition to prevent premature oxidation of the oxygen scavenging polymer.

20 Suitable photoinitiators are well known to those skilled in the art. Specific examples include, but are not limited to, benzophenone, o-methoxybenzophenone, acetophenone, o-methoxy-acetophenone, acenaphthenequinone, methyl ethyl ketone, valerophenone, hexanophenone,  $\alpha$ -phenyl-butyrophenone, p-morpholinopropiophenone, dibenzosuberone, 4-morpholinobenzophenone, benzoin, benzoin methyl ether, 4-o-  
25 morpholinodeoxybenzoin, p-diacetylbenzene, 4-aminobenzophenone, 4'-methoxyacetophenone,  $\alpha$ -tetralone, 9-acetylphenanthrene, 2-acetylphenanthrene, 10-thioxanthenone, 3-acetylphenanthrene, 3-acetylimidole, 9-fluorenone, 1-indanone, 1,3,5-triacetylbenzene, thioxanthen-9-one, xanthene-9-one, 7-H-benz[de]anthracen-7-one, benzoin tetrahydropyranyl ether, 4,4'-bis(dimethylamino)-benzophenone, 1'-  
30 acetonaphthone, 2'-acetonaphthone, acetonaphthone and 2,3-butanedione, benz[a]anthracene-7,12-dione, 2,2-dimethoxy-2-phenylacetophenone,  $\alpha,\alpha$ -

diethoxyacetophenone, and  $\alpha,\alpha$ -dibutoxyacetophenone, among others. Singlet oxygen generating photosensitizers such as Rose Bengal, methylene blue, and tetraphenyl porphine may also be employed as photoinitiators. Polymeric initiators include poly(ethylene carbon monoxide) and oligo[2-hydroxy-2-methyl-1-[4-(1-methylvinyl)phenyl]propanone].


Use of a photoinitiator is preferable because it generally provides faster and more efficient initiation of oxygen scavenging by the oxygen scavenging polymer. However, due to the high cost of photoinitiators, it is desirable to use the minimum amount of photoinitiator required to initiate oxygen scavenging. This minimum amount will vary depending on the photoinitiator used, the wavelength and intensity of ultraviolet light used to initiate, and other factors. Preferably, the photoinitiator is either on the U.S. Food and Drug Administration GRAS (generally regarded as safe) list, or exhibits substantially no migration from the packaging article to the product (i.e. less than 50 ppb in the product).

Photoinitiators that are especially useful in the present invention include benzophenone derivatives containing at least two benzophenone moieties, as described in copending U.S. patent application 08/857,325, filed May 16, 1997. These compounds act as effective photoinitiators to initiate oxygen scavenging activity in the oxygen barrier composition of the present invention. Such benzophenone derivatives have a very low degree of extraction from oxygen scavenging compositions, which may lead to reduced malodor or off-taste of a packaged food, beverage, or oral pharmaceutical product by extracted photoinitiator.

A "benzophenone moiety" is a substituted or unsubstituted benzophenone group. Suitable substituents include alkyl, aryl, alkoxy, phenoxy, and alicyclic groups containing from 1 to 24 carbon atoms or halides.

The benzophenone derivatives include dimers, trimers, tetramers, and oligomers of benzophenones and substituted benzophenones.

The benzophenone photoinitiators are represented by the formula:



wherein A is a bridging group selected from sulfur; oxygen; carbonyl;  $-\text{SiR}''_2-$ , wherein each R'' is individually selected from alkyl groups containing from 1 to 12 carbon atoms, aryl groups containing 6 to 12 carbon atoms, or alkoxy groups containing from 1 to 12 carbon atoms;  $-\text{NR}'''-$ , wherein R''' is an alkyl group containing 1 to 12 carbon atoms, an aryl group containing 6 to 12 carbon atoms, or hydrogen; or an organic group containing from 1 to 50 carbon atoms; a is an integer from 0 to 11; B is a substituted or unsubstituted benzophenone group; and b is an integer from 2 to 12.

The bridging group A can be a divalent group, or a polyvalent group with 3 or more benzophenone moieties. The organic group, when present, can be linear, branched, cyclic (including fused or separate cyclic groups), or an arylene group (which can be a fused or non-fused polyaryl group). The organic group can contain one or more heteroatoms, such as oxygen, nitrogen, phosphorous, silicon, or sulfur, or combinations thereof. Oxygen can be present as, for example, an ether, ketone, aldehyde, ester, or alcohol.

The substituents of B, herein R'', when present, are individually selected from alkyl, aryl, alkoxy, phenoxy, or alicyclic groups containing from 1 to 24 carbon atoms, or halides. Each benzophenone moiety can have from 0 to 9 substituents. Substituents can be selected to render the photoinitiator more compatible with the oxygen barrier composition.

Examples of such benzophenone derivatives comprising two or more benzophenone moieties include dibenzoyl biphenyl, substituted dibenzoyl biphenyl, benzoylated terphenyl, substituted benzoylated terphenyl, tribenzoyl triphenylbenzene, substituted tribenzoyl triphenylbenzene, benzoylated styrene oligomer (a mixture of compounds containing from 2 to 12 repeating styrenic groups, comprising dibenzoylated 1,1-diphenyl ethane, dibenzoylated 1,3-diphenyl propane, dibenzoylated 1-phenyl naphthalene, dibenzoylated styrene dimer, dibenzoylated styrene trimer, and tribenzoylated styrene trimer), and substituted benzoylated styrene oligomer. Tribenzoyl triphenylbenzene and substituted tribenzoyl triphenylbenzene are especially preferred.

When a photoinitiator is used, its primary function is to enhance and facilitate the initiation of oxygen scavenging by an oxygen barrier layer comprising the oxygen barrier composition upon exposure to radiation. The amount of photoinitiator can vary. In many

instances, the amount will depend on the blend ratio or the particular oxygen scavenging polymer used, the wavelength and intensity of UV radiation used, the nature and amount of antioxidants used, as well as the type of photoinitiator used. The amount of photoinitiator also depends on the intended use of the composition. For instance, if the photoinitiator-containing component is placed underneath a layer which is somewhat opaque to the radiation used, more initiator may be needed. For most purposes, however, the amount of photoinitiator, when used, will be in the range of 0.01 to 10% by weight of the oxygen barrier composition.

Antioxidants can be used in the composition to control scavenging initiation. An antioxidant as defined herein is a material which inhibits oxidative degradation or cross-linking of polymers. Typically, antioxidants are added to facilitate the processing of polymeric materials or prolong their useful lifetime. In relation to this invention, such additives prolong the induction period for oxygen scavenging in the absence of irradiation. When it is desired to commence oxygen scavenging by the oxygen scavenging polymer of the oxygen barrier layer of the packaging article, the packaging article (and any incorporated photoinitiator) can be exposed to radiation.

Antioxidants such as 2,6-di(t-butyl)-4-methylphenol(BHT), 2,2'-methylene-bis(6-t-butyl-p-cresol), triphenylphosphite, tris-(nonylphenyl)phosphite, vitamin E, tetrabismethylene 3-(3,5-ditertbutyl-4-hydroxyphenyl)-propionate methane, and dilaurylthiodipropionate are suitable for use with this invention.

The amount of an antioxidant which may be present may also have an effect on oxygen scavenging. As mentioned earlier, such materials are usually present in oxidizable organic compounds or structural polymers to prevent oxidation or gelation of the polymers. Typically, they are present in about 0.01 to 1% by weight of the composition. However, additional amounts of antioxidant may also be added if it is desired to tailor the induction period as described above.

Other additives which can be included in the oxygen barrier layer include, but are not necessarily limited to, fillers, pigments, dyestuffs, stabilizers, processing aids, plasticizers, fire retardants, and anti-fog agents, among others.

Any other additives employed normally will not comprise more than 10% of the composition by weight, with preferable amounts being less than 5% by weight of the composition.

5 The oxygen barrier composition can be stored after being made, or can be made as part of a process of forming a packaging article, as will be described below.

In addition to the oxygen barrier layer, if the packaging article is a multilayer article, it can comprise other layers useful in a flexible or rigid multilayer packaging article.

10 As stated above, if a transition metal salt is included in the packaging article to increase the rate of oxygen scavenging or reduce the induction time, the transition metal can be included either in the oxygen barrier layer or in a layer adjacent to the oxygen barrier layer. Any transition metal salt described above can be formed in the adjacent layer.

15 The oxygen barrier layer can also comprise a photoinitiator, an antioxidant, or both, as described above. Other additives can also be included as desired.

A multilayer packaging article of the present invention can also comprise at least one structural layer located to the interior, the exterior, or both of the oxygen barrier layer. The structural layer or layers comprise a structural polymer that imparts useful structural properties, such as rigidity, flexibility, or strength, among others, to the packaging article. Suitable structural polymers include, but are not limited to, 20 polyethylene, low density polyethylene, very low density polyethylene, ultra-low density polyethylene, high density polyethylene, polyvinyl chloride, ethylene-vinyl acetate, ethylene-alkyl (meth)acrylates, ethylene-(meth)acrylic acid, PET, polyamides, polypropylene, or ethylene-(meth)acrylic acid ionomers. Blends of different structural 25 polymers may also be used. However, the selection of the structural polymer largely depends on the article to be manufactured and the end use thereof. Such selection factors are well known in the art.

Preferably, the structural polymer is selected from PET, polyamides, polypropylene, polyethylene, low density polyethylene, very low density polyethylene, 30 ultra-low density polyethylene, high density polyethylene, polyvinyl chloride, ethylene-



vinyl acetate, ethylene-alkyl (meth)acrylates, ethylene-(meth)acrylic acid, or ethylene-(meth)acrylic acid ionomers.

If the packaging article is a rigid carton, such as a juice carton, the structural layer can comprise paperboard or cardboard.

5        Also, a multilayer packaging article may comprise an oxygen scavenging layer, comprising an oxygen scavenging polymer and, optionally, other additives, such as a photoinitiator, a transition metal catalyst, an antioxidant, a structural polymer, or others, alone or in any combination, as described above. The oxygen scavenging layer can be an integral part of the packaging article, or it can be a liner, coating, sealant, gasket,  
10        adhesive, non-adhesive insert, or fibrous mat insert in the packaging article.

         Additionally, a multilayer packaging article according to the present invention may further comprise at least one oxygen barrier layer, i.e. a layer having an oxygen transmission rate equal to or less than 100 cubic centimeters per square meter ( $\text{cc/m}^2$ ) per day per atmosphere at room temperature (about  $25^\circ\text{C}$ ), wherein the layer does not  
15        comprise an oxygen scavenging polymer. Typical oxygen barrier layers comprise poly(ethylene/vinyl alcohol) (EVOH), polyacrylonitrile, a copolymer comprising acrylonitrile, poly(vinylidene dichloride), polyethylene terephthalate (PET), silica, polyamide other than MXD6, or mixtures thereof. However, because the blend of the oxygen barrier polymer and the oxygen scavenging polymer inhibits oxygen transmission  
20        to a high degree, the need for a separate oxygen barrier layer is reduced and may, depending on the form of the packaging article and the intended use, be dispensed with entirely, if desired.

         Other additional layers of a multilayer packaging article may include one or more layers which are permeable to oxygen. In one packaging article, preferred for flexible  
25        packaging of food and scavenging of oxygen found in the packaged food, the layers include, in order starting from the outside of the package to the innermost layer of the package, (i) an oxygen barrier layer, (ii) an optional oxygen scavenging layer, and (iii) an optional oxygen-permeable layer. Control of the oxygen barrier property of (i) limits the rate of oxygen entry to the oxygen scavenging moieties in layer (ii), and thus slows the  
30        consumption of oxygen scavenging capacity by atmospheric oxygen. Control of the oxygen permeability of layer (iii) impacts the rate of oxygen scavenging for the overall

structure. Furthermore, layer (iii) can provide a barrier to migration of the components of the outer layers, or by-products of the reaction of such components with oxygen or other reactants, into the package interior. Even further, layer (iii) can improve the heat-sealability, clarity, or resistance to blocking of the multilayer packaging article.

5           Further additional layers, such as adhesive layers, may also be used in the multilayer packaging article. Compositions typically used for adhesive layers include anhydride functional polyolefins and other well-known adhesive layers.

10           In another embodiment, the present invention relates to a method of making an oxygen barrier composition comprising an oxygen barrier polymer and an oxygen scavenging polymer, comprising blending the oxygen barrier polymer and the oxygen scavenging polymer.

15           The oxygen barrier polymer and the oxygen scavenging polymer are as described above. Typically, the oxygen barrier polymer and the oxygen scavenging polymer are provided as a solid formulation, such as pellets or a powder.

20           The blend can be prepared by mixing the oxygen barrier polymer and the oxygen scavenging polymer in any appropriate apparatus. Typically, the oxygen barrier polymer and the oxygen scavenging polymer are mixed together, heated to melting and stirred to homogeneity, and the homogenous melt is then extruded. The extruded melt is then typically cooled and pelletized to form pellets of the blend. However, other forms of the blend, such as a powder, are possible. Other techniques of preparing the blend may be apparent to one of ordinary skill in the art.

25           To aid mixing of the oxygen barrier polymer and the oxygen scavenging polymer, the blending step can further comprise blending a compatibilizer with the oxygen barrier polymer and the oxygen scavenging polymer. The compatibilizer is as described above. The blending can also be integrated directly into the manufacturing process or forming step of the final packaging article as the feed material.

30           Alternatively, if the oxygen scavenging polymer is desired as a filler in the oxygen barrier polymer phase, then the composition can be prepared by, first, internally cross-linking the oxygen scavenging polymer, such as by chemical cross-linking or


polymerization, and second, mixing the insoluble oxygen scavenging polymer with the oxygen barrier polymer.

The blend can also comprise other constituents, such as a transition metal salt, a photoinitiator, an antioxidant, or any combination thereof, among others, as described above. The constituents can generally be added to the blending step. If the OSP is provided as a filler, the constituents are typically blended with the oxygen barrier polymer phase.

After being made, the blend can be stored for at least several days, and preferably indefinitely, or it can be made as part of a method of forming an oxygen barrier layer in a packaging article, as described below. In such a method, the blended composition is fed from the extruder or other blending apparatus directly into further steps of the method.

In another embodiment, the present invention relates to a method of forming an oxygen barrier layer in a packaging article, comprising: (i) providing an oxygen barrier composition comprising an oxygen barrier polymer and an oxygen scavenging polymer; and (ii) forming the composition into the packaging article or the oxygen barrier layer thereof.


The packaging article can be flexible or rigid, single-layer or multilayer, as described above. The oxygen barrier polymer and the oxygen scavenging polymer are also as described above. Preferably, the oxygen scavenging polymer comprises an ethylenic backbone and a cycloalkenyl group having structure I:



wherein q<sub>1</sub>, q<sub>2</sub>, q<sub>3</sub>, q<sub>4</sub>, and r are independently selected from hydrogen, methyl, or ethyl; m is -(CH<sub>2</sub>)<sub>n</sub>-, wherein n is an integer from 0 to 4, inclusive; and, when r is hydrogen, at least one of q<sub>1</sub>, q<sub>2</sub>, q<sub>3</sub>, and q<sub>4</sub> is also hydrogen.

More preferably, the oxygen scavenging polymer is EMCM, ECHA, EVCH, or CHAA.

Another preferred oxygen scavenging polymer comprises a polyester comprising at least one monomer unit derived from a diol having the structure II:



wherein  $q_1$ ,  $q_2$ ,  $q_3$ ,  $q_4$ , and  $r$  are independently selected from hydrogen, methyl, or ethyl;  $m$  is  $-(CH_2)_n-$ , wherein  $n$  is an integer from 0 to 4, inclusive; and, when  $r$  is hydrogen, at least one of  $q_1$ ,  $q_2$ ,  $q_3$ , and  $q_4$  is also hydrogen. Preferably, the diol is 3-cyclohexene-1,1-dimethanol.

Still another preferred oxygen scavenging polymer is EMBZ, as discussed above.

The forming step can be by any technique appropriate depending on the oxygen barrier composition, the packaging article, and other parameters. As mentioned above, single layered packaging articles typically can be prepared by solvent casting, injection molding, blow molding, injection blow molding, or extrusion, among others. Packaging articles with multiple layers are typically prepared using coextrusion, injection molding, blow molding, injection blow molding, coating, or lamination, among others.

If a transition metal catalyst is desired for inclusion in the packaging article, to catalyze oxygen scavenging by the composition, the forming step comprises forming a transition metal catalyst into the oxygen barrier layer or a layer adjacent to the oxygen barrier layer of the packaging article.

The oxygen barrier composition can also comprise a photoinitiator, an antioxidant, a structural polymer, or other additives as described above.

In addition to the oxygen barrier layer, the packaging article to be formed can comprise other layers, such as an oxygen barrier layer not comprising an oxygen scavenging polymer, a structural layer, an oxygen scavenging layer, or a seal layer or

food contact layer forming the interior surface of the packaging article, among others. Depending on the desired form of the packaging article, the forming step can comprise forming the packaging article as a single layer flexible article, a multilayer flexible article, a single layer rigid article, or a multilayer rigid article.

5

The following examples are included to demonstrate preferred embodiments of the invention. It should be appreciated by those of skill in the art that the techniques disclosed in the examples which follow represent techniques discovered by the inventor to function well in the practice of the invention, and thus can be considered to constitute preferred modes for its practice. However, those of skill in the art should, in light of the present disclosure, appreciate that many changes can be made in the specific embodiments which are disclosed and still obtain a like or similar result without departing from the spirit and scope of the invention.

15      Example 1. Preparation of a multi-layer film with an oxygen barrier core layer

A series of four dry blend samples were prepared from pellets of ethylene-vinyl alcohol copolymer (EVOH), ethylene/methyl acrylate/cyclohexenylmethyl acrylate terpolymer (EMCM), and an ethylene/methyl acrylate copolymer- (EMAC-) based cobalt masterbatch (containing 1 wt% tribenzoyl triphenylbenzene (BBP<sup>3</sup>) and 1 wt% cobalt as cobalt oleate) by mixing in a polyethylene bag. The samples differed in the weight ratio among EVOH, EMCM, and the cobalt masterbatch. A fifth sample consisting of EVOH was prepared as a control. The proportions of the ingredients in the blends are shown in Table 1.

25

Table 1. Blend Composition

Material	EVOH, % by wt.	EMCM % by wt.	Masterbatch % by wt.
Sample 1	95	4.5	0.5
Sample 2	90	9	1
Sample 3	87	9	4

Sample 4	80	18	2
Sample 5	100	0	0

The EVOH (Soarnol A4412 grade, from Nippon Synthetic Chemical Industry Co.) used contained 44 mole% ethylene content and had a melt index of 12 g/10min at 210 °C and a loading of 2.16 kg, and a melting point of 164 °C. The EVOH resin was dried at 90 °C for 3 hours under vacuum to remove residual moisture.

EMCM, the oxygen scavenging polymer used, was as discussed in the previous section, and was obtained from Chevron Chemical Co.

The EMAC-based cobalt masterbatch (containing 1 wt% BBP<sup>3</sup> and 1 wt% cobalt as cobalt oleate) was obtained from Chevron Chemical Co.

The above four dry blends and the control (Samples 1-5) were melt blended on a Hakke twin screw extruder at temperature range of 190 °C to 220 °C at 30 rpm screw speed. A three layer film was cast from each composition from a Randcastle coextrusion machine, with the oxygen barrier blend composition or control as core layer and commercial polyethylene as interior and exterior skin layers. The dimension of the three layer films was controlled at 0.5 mil/1.0 mil/0.5 mil. The temperature settings for film casting were in the range of 430 °F and screw speeds were in the range of 15 rpm to 30 rpm. The material of each individual layer was fed into one of the two extruders of the Randcastle machine. While in the die, the layers were juxtaposed and combined, then emerged from the die as a three-layer film. After exiting the die, the film was oriented monoaxially: the extrudate was cast onto a first controlled temperature casting roll with stretching in the machine direction and the film was then collected at the second roll. All the films made were transparent with light color.

#### Example 2. Oxygen Transmission Test on Mocon.

The films prepared in Example 1 were tested for oxygen permeability using a Mocon Ox-Trans 2/20 ML system at 23 °C. Nitrogen containing 2% hydrogen was used as carrier gas to flush both sides of the film at 10 cc/min flow rate for 1-4 hrs before

testing. Air was used as test gas at 10 cc/min flow rate. The oxygen permeability was measured in cubic centimeters per square meter per 24 hours. The film size for the test was 50 cm<sup>2</sup>. Oxygen scavenging by EMCM in the oxygen barrier layer was triggered by exposing the film to UV light at 254 nm.

5

Table 2. Oxygen Permeability

Material	EVOH, % by wt.	EMCM % by wt.	Masterbatch % by wt.	Oxygen Permeability cc/m <sup>2</sup> ·day
Sample 1	95	4.5	0.5	---
Sample 2	90	9	1	4.16
Sample 3	87	9	4	0.62
Sample 4	80	18	2	0.0
Sample 5	100	0	0	4.64

From the above table, it is apparent that the presence of the oxygen scavenging polymer EMCM in the EVOH matrix (i.e. having an active oxygen barrier) can significantly lower the oxygen permeability of a film, relative to films comprising oxygen barrier layers not comprising an oxygen scavenging polymer as are known in the art. At 9 wt% loading of EMCM (sample 3), the oxygen permeability was lowered about 7-fold with the presence of sufficient cobalt masterbatch. At 18 wt% loading of EMCM, the oxygen permeability was lowered to substantially zero.

15

All of the compositions and methods disclosed and claimed herein can be made and executed without undue experimentation in light of the present disclosure. While the compositions and methods of this invention have been described in terms of preferred embodiments, it will be apparent to those of skill in the art that variations may be applied to the compositions and methods and in the steps or in the sequence of steps of the method described herein without departing from the concept, spirit and scope of the invention. More specifically, it will be apparent that certain agents which are both chemically and physiologically related may be substituted for the agents described herein

20

while the same or similar results would be achieved. All such similar substitutes and modifications apparent to those skilled in the art are deemed to be within the spirit, scope and concept of the invention as defined by the appended claims.

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214  
2215  
2216  
2217  
2218  
2219  
2220  
2221  
2222  
2223  
2224  
2225  
2226  
2227  
2228  
2229  
2230  
2231  
2232  
2233  
2234  
2235  
2236  
2237